





Certificates & Standards
CB / RoHs / CISPR15 / TISI / CR

Dimension and Materials



Photometric Chart

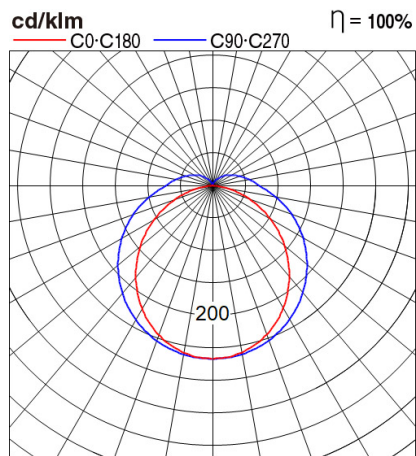

Ref. No.	
Type of Luminaire	Batten
	Standard Batten (Pro)
	AG Batten
Set Model No.	NFV30052WE
Type of Light Source	LED
Power Input	28W
System Lumen Output	4000 lm
System Efficacy	143 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	6500K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	110deg.
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaries	Class II
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	50mm*1200mm*48mm
Weight	0.7 kg
Body	Aluminum
Reflector	
Diffuser	PC(Frost)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Others

Spec and certification may change without notice.