





Certificates & Standards
CB / RoHs / CISPR15 / CR

Dimension and Materials

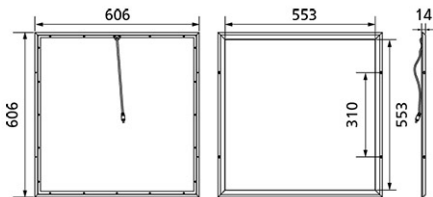

Photometric Chart

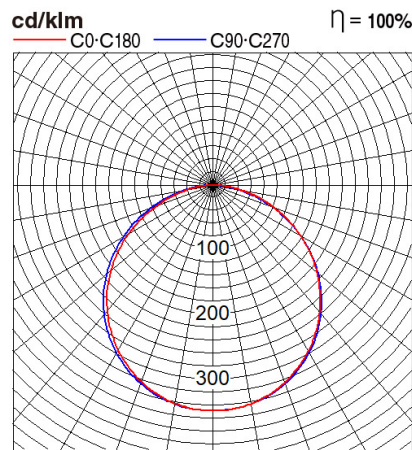

Ref. No.	
Type of Luminaire	Baselight
	Cleanroom Baselight
	Cleanroom
Set Model No.	NFV60021WE1A
Type of Light Source	LED
Power Input	40W
System Lumen Output	4000 lm
System Efficacy	100 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	4000K
CRI	
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	120deg.
Rotation Angle	
Tilt Angle	
IP code	40
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	606mm*606mm*14mm
Weight	2.44 kg
Body	Aluminum
Reflector	
Diffuser	PS
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Others

Spec and certification may change without notice.