Panasonic

Certificates & Standards
CB / RoHs / CISPR15 / TISI / CR

Dimension and Materials

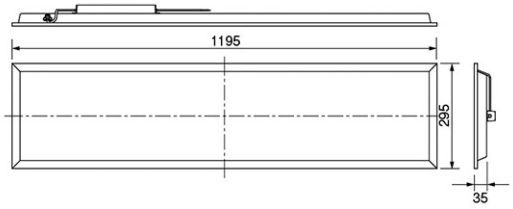

Photometric Chart

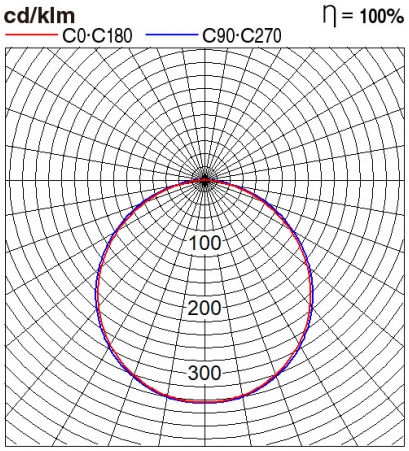

Ref. No.	
Type of Luminaire	Baselight
	Standard Baselight (Pro)
	Ex 2G
Set Model No.	**NNFC70620LE88**

Type of Light Source	LED
Power Input	36W
System Lumen Output	3900 lm
System Efficacy	108 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	3000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35℃
Surge Protection	
Classification of Luminaries	Class Ⅱ
THDi	<10%
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	295mm*1195mm*35mm
Weight	2 kg
Body	SPCC(White)
Reflector	
Diffuser	PS(Frost)
Trim	Aluminium(White)
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others

2024.11.8