





Certificates & Standards
CB / RoHs / CISPR15 / TISI / CR

Dimension and Materials

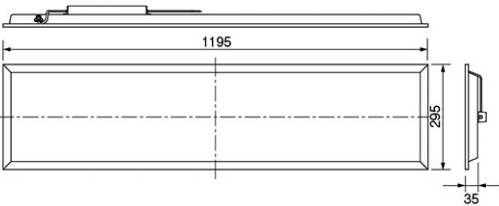

Photometric Chart

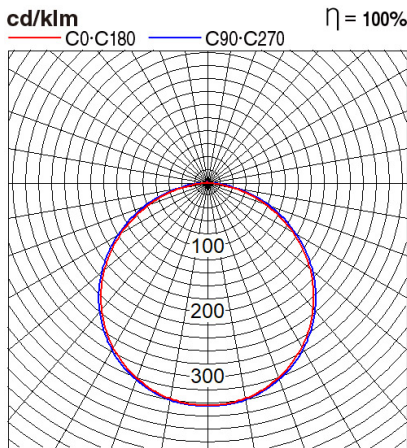

Ref. No.	
Type of Luminaire	Baselight
	Standard Baselight (Pro)
	Ex 2G
Set Model No.	NNFC70670LE88
Type of Light Source	LED
Power Input	36W
System Lumen Output	3900 lm
System Efficacy	108 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	4000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	
Rotation Angle	
Tilt Angle	
IP code	20
IK code	
Ambient Temperature Range	5 - 35°C
Surge Protection	
Classification of Luminaires	Class II
THDi	<10%
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	295mm*1195mm*35mm
Weight	2 kg
Body	SPCC(White)
Reflector	
Diffuser	PS(Frost)
Trim	Aluminium(White)
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others