





Certificates & Standards  
RoHs

Dimension and Materials



Photometric Chart

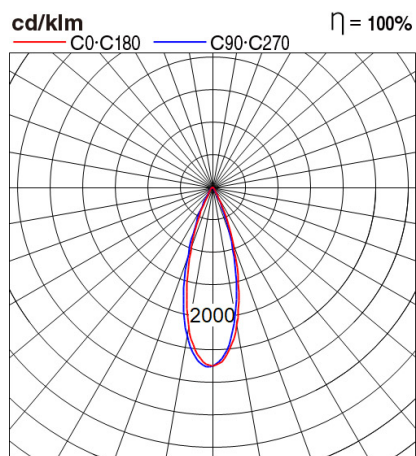

|                              |                              |
|------------------------------|------------------------------|
| Ref. No.                     |                              |
| Type of Luminaire            | Floodlight                   |
|                              | Decorative Light             |
|                              | Floodlight RGBW & Mono Color |
| Set Model No.                | NNP31850GL                   |
| Type of Light Source         | LED                          |
| Power Input                  | 20W                          |
| System Lumen Output          | 900 lm                       |
| System Efficacy              | 45 lm/W                      |
| Power Voltage                | DC24V                        |
| Power Factor                 |                              |
| Lifetime                     | 50000H(L70)                  |
| CCT                          | RGBWK                        |
| CRI                          |                              |
| SDCM                         |                              |
| Input Frequency              |                              |
| Dimming                      | non-Dimmable                 |
| Dimming Range                |                              |
| UGR                          |                              |
| Glare Cut Angle              | 75deg.                       |
| Beam Angle                   | 30deg.                       |
| Rotation Angle               |                              |
| Tilt Angle                   |                              |
| IP code                      | 66                           |
| IK code                      |                              |
| Ambient Temperature Range    | -25° - 50°C                  |
| Surge Protection             |                              |
| Classification of Luminaries |                              |
| THDi                         |                              |
| Effective Projected Area     |                              |
| Driver                       | Integrated                   |
| Cut Out Size                 |                              |
| Dimensions                   | 158mm*133mm                  |
| Weight                       | 1.75 kg                      |
| Body                         | Painted ADC                  |
| Reflector                    |                              |
| Diffuser                     |                              |
| Trim                         |                              |
| Casing                       |                              |
| Country of Origin            | China                        |
| Brand                        | Panasonic                    |
| Remarks                      |                              |

Spec and certification may change without notice.

Others