


Panasonic




Certificates & Standards

RoHs

Dimension and Materials



Photometric Chart

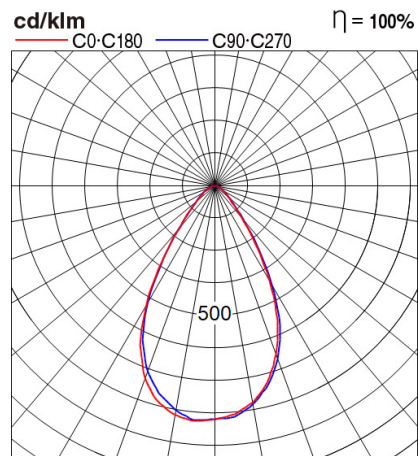

Ref. No.	
Type of Luminaire	Floodlight
	Standard Floodlight (Pro)
	Floodlight
Set Model No.	NNP34915K031
Type of Light Source	LED
Power Input	180W
System Lumen Output	21600 lm
System Efficacy	120 lm/W
Power Voltage	100-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	3000K
CRI	70
SDCM	
Input Frequency	50/60Hz
Dimming	Dimmable
Dimming Range	
UGR	
Glare Cut Angle	60deg.
Beam Angle	60deg.
Rotation Angle	360deg.
Tilt Angle	
IP code	66
IK code	
Ambient Temperature Range	-35° - 40°C
Surge Protection	
Classification of Luminaries	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	320mm*410mm*118mm
Weight	7.22 kg
Body	ADC
Reflector	
Diffuser	Polycarbonate
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	

Spec and certification may change without notice.

Others