



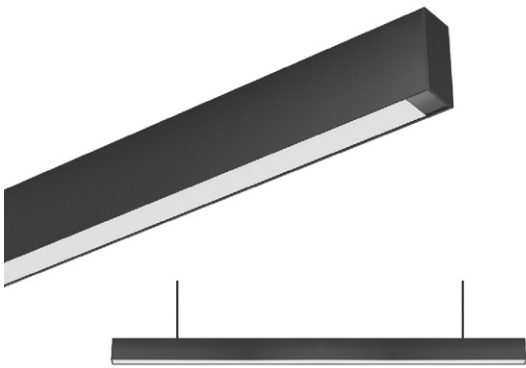


Certificates & Standards

RoHs

Dimension and Materials

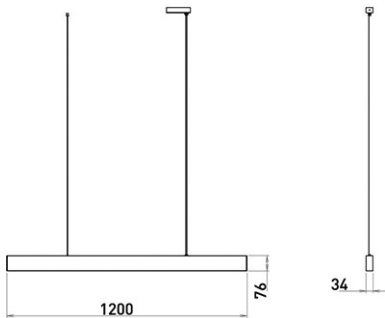

Photometric Chart

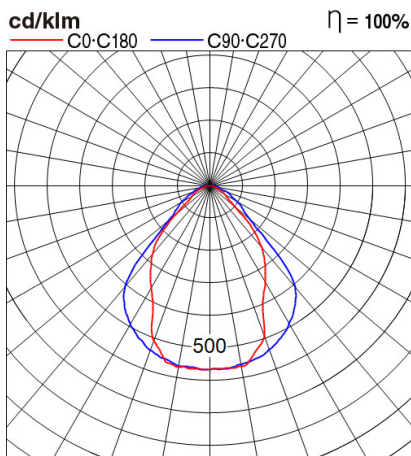

Ref. No.	
Type of Luminaire	Baselight
	Linear Light
	Pendant Linear
Set Model No.	NNP94400031
Type of Light Source	LED
Power Input	20W
System Lumen Output	1500 lm
System Efficacy	75 lm/W
Power Voltage	220-240V
Power Factor	0.9
Lifetime	50000H(L70)
CCT	2700K
CRI	90
SDCM	
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	45deg.
Beam Angle	90deg.
Rotation Angle	
Tilt Angle	
IP code	44
IK code	
Ambient Temperature Range	-20° - 40°C
Surge Protection	
Classification of Luminaries	
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	34mm*1200mm*76mm
Weight	2.45 kg
Body	Aluminium Extrusion
Reflector	
Diffuser	
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Power consumption per light source (W) 7-40, System lumen output (lm) 250-3800

Spec and certification may change without notice.

Others