





Certificates & Standards
CB / RoHs / TISI

Dimension and Materials

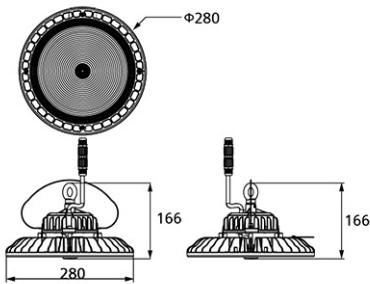

Photometric Chart

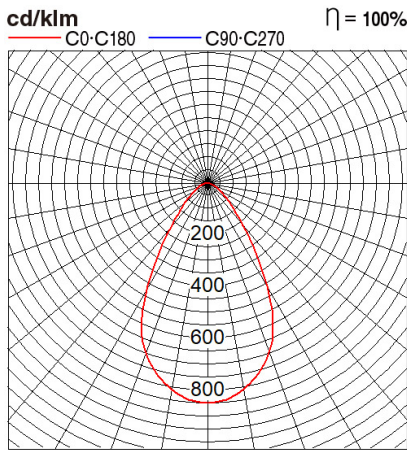

Ref. No.	
Type of Luminaire	High Bay
	High Efficacy/Standard High Bay
	Standard Ex 4G
Set Model No.	NYV20152BE2A
Type of Light Source	LED
Power Input	140W
System Lumen Output	20000 lm
System Efficacy	143 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	50000H(L70)
CCT	5000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	60deg.
Rotation Angle	
Tilt Angle	
IP code	65
IK code	IK10
Ambient Temperature Range	-30 - 50℃
Surge Protection	10kV
Classification of Luminaires	Class I
THDi	
Effective Projected Area	
Driver	Integrated
Cut Out Size	
Dimensions	280mm*166mm
Weight	2.51 kg
Body	ADC(Black)
Reflector	
Diffuser	PC(Transparent)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	Corrosion protection:WF2

Spec and certification may change without notice.

Others