





**Certificates & Standards**  
CB / RoHs / TISI

**Dimension and Materials**

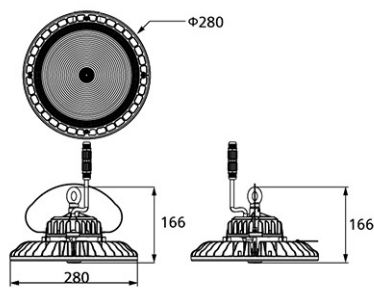

**Photometric Chart**

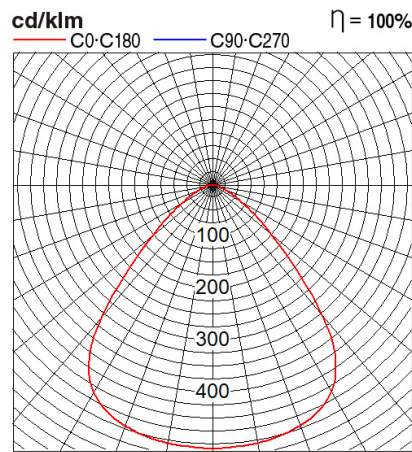

|                              |                                 |
|------------------------------|---------------------------------|
| Ref. No.                     |                                 |
| Type of Luminaire            | High Bay                        |
|                              | High Efficacy/Standard High Bay |
|                              | Standard Ex 4G                  |
| Set Model No.                | <b>NYV20157BE2A</b>             |
| Type of Light Source         | LED                             |
| Power Input                  | 140W                            |
| System Lumen Output          | 21000 lm                        |
| System Efficacy              | 150 lm/W                        |
| Power Voltage                | 220-240V                        |
| Power Factor                 | 0.95                            |
| Lifetime                     | 50000H(L70)                     |
| CCT                          | 5000K                           |
| CRI                          | 80                              |
| SDCM                         | <5                              |
| Input Frequency              | 50/60Hz                         |
| Dimming                      | non-Dimmable                    |
| Dimming Range                |                                 |
| UGR                          |                                 |
| Glare Cut Angle              |                                 |
| Beam Angle                   | 90deg.                          |
| Rotation Angle               |                                 |
| Tilt Angle                   |                                 |
| IP code                      | 65                              |
| IK code                      | IK10                            |
| Ambient Temperature Range    | -30 - 50℃                       |
| Surge Protection             | 10kV                            |
| Classification of Luminaires | Class I                         |
| THDi                         |                                 |
| Effective Projected Area     |                                 |
| Driver                       | Integrated                      |
| Cut Out Size                 |                                 |
| Dimensions                   | 280mm*166mm                     |
| Weight                       | 2.51 kg                         |
| Body                         | ADC(Black)                      |
| Reflector                    |                                 |
| Diffuser                     | PC(Transparent)                 |
| Trim                         |                                 |
| Casing                       |                                 |
| Country of Origin            | China                           |
| Brand                        | Panasonic                       |
| Remarks                      | Corrosion protection:WF2        |

Spec and certification may change without notice.

Others