





Certificates & Standards
CB / RoHs

Dimension and Materials

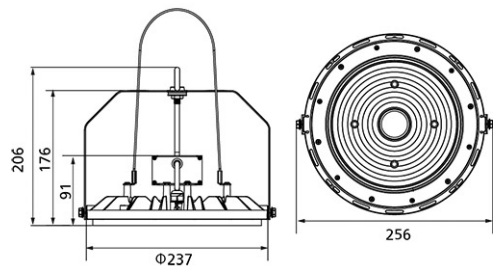

Photometric Chart

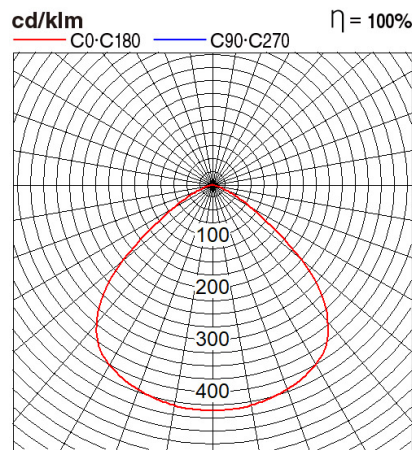

Ref. No.	
Type of Luminaire	High Bay
	High Bay Special Environment
	SP High Bay Low Temperature Type
Set Model No.	NYV20405BE1A
Type of Light Source	LED
Power Input	75W
System Lumen Output	10000 lm
System Efficacy	133 lm/W
Power Voltage	220-240V
Power Factor	0.95
Lifetime	30000H(L70)
CCT	5000K
CRI	80
SDCM	<5
Input Frequency	50/60Hz
Dimming	non-Dimmable
Dimming Range	
UGR	
Glare Cut Angle	
Beam Angle	90deg.
Rotation Angle	
Tilt Angle	
IP code	65
IK code	
Ambient Temperature Range	-40 - 50℃
Surge Protection	
Classification of Luminaires	Class I
THDi	
Effective Projected Area	
Driver	External
Cut Out Size	
Dimensions	256mm*206mm
Weight	1.4 kg
Body	Aluminium(Black)
Reflector	
Diffuser	PC(Transparent)
Trim	
Casing	
Country of Origin	China
Brand	Panasonic
Remarks	moisture condensation proof designed

Spec and certification may change without notice.

Others